




TB-SPC V-belt pulleys for taper bush - 6 grooves

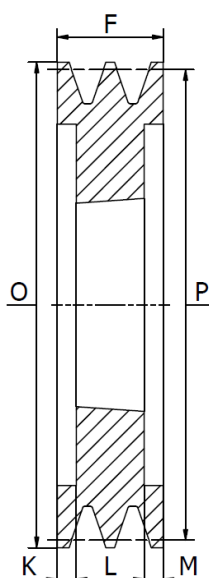

TYPE 3

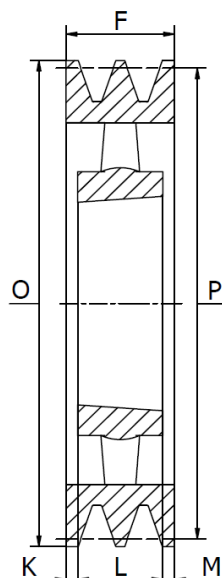

TYPE 5

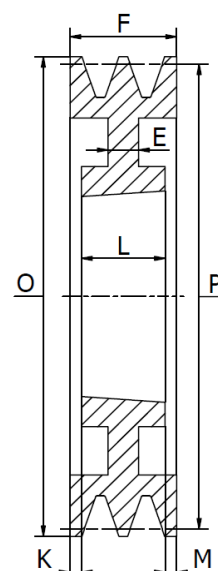

TYPE 6

Part No.	Taper bush	Ø Max.	Dimensions (mm)							Type	Weight (kg)
			P	O	E	F	K	L	M		
TB-SPC 200X6-3535	3535	90	200	209,6	-	162	36,5	89	36,5	3	15,40
TB-SPC 212X6-3535	3535	90	212	221,6	-	162	36,5	89	36,5	3	17,30
TB-SPC 224X6-3535	3535	90	224	233,6	-	162	36,5	89	36,5	3	20,00
TB-SPC 236X6-3535	3535	90	236	245,6	-	162	36,5	89	36,5	3	23,00
TB-SPC 250X6-3535	3535	90	250	259,6	-	162	36,5	89	36,5	3	25,00
TB-SPC 265X6-3535	3535	90	265	274,6	-	162	36,5	89	36,5	3	27,00
TB-SPC 280X6-3535	3535	90	280	289,6	20	162	36,5	89	36,5	6	30,00
TB-SPC 300X6-3535	3535	90	300	309,6	20	162	36,5	89	36,5	6	32,50
TB-SPC 315X6-3535	3535	90	315	324,6	20	162	36,5	89	36,5	6	34,40
TB-SPC 335X6-3535	3535	90	335	344,6	20	162	36,5	89	36,5	6	37,00
TB-SPC 355X6-3535	3535	90	355	364,6	20	162	36,5	89	36,5	6	38,00
TB-SPC 375X6-4040	4040	100	375	384,6	30	162	30	102	30	6	44,00
TB-SPC 400X6-4040	4040	100	400	409,6	30	162	30	102	30	6	49,00
TB-SPC 425X6-4040	4040	100	425	434,6	30	162	30	102	24	6	59,50
TB-SPC 450X6-4545	4545	110	450	459,6	30	162	24	114	24	6	60,00
TB-SPC 475X6-4545	4545	110	475	484,6	30	162	24	114	24	6	65,40
TB-SPC 500X6-4545	4545	110	500	509,6	-	162	24	114	24	5	69,50
TB-SPC 530X6-5050	5050	125	530	539,6	-	162	17,5	114	17,5	5	82,00
TB-SPC 560X6-5050	5050	125	560	569,6	-	162	17,5	127	17,5	5	87,00
TB-SPC 630X6-5050	5050	125	630	639,6	-	162	17,5	127	17,5	5	100,00
TB-SPC 710X6-5050	5050	125	710	719,6	-	162	17,5	127	17,5	5	120,00
TB-SPC 800X6-5050	5050	125	800	809,6	-	162	17,5	127	17,5	5	145,00
TB-SPC 1000X6-5050	5050	125	1000	1009,6	-	162	17,5	127	17,5	5	180,00
TB-SPC 1250X6-5050	5050	125	1250	1259,6	-	162	17,5	127	17,5	5	223,00